


[multi-format video recorder]

LINE XVR 8 H.265



- “Line XVR” - a multi-format video recorder for connecting up to 8 cameras. “Line” software in a kit.

- Working with cameras of formats



Individual setting for each channel.

- The housing can accommodate two hard drives with the total volume of 24 terabytes.

► SPECIFICATION FOR ANALOG AHD/TVI/CVI/CVBS CAMERAS

| Resolution of the analog camera / FPS | Processed XVR resolution / FPS | Total FPS (display/recording) | Number of channels x maximum FPS* | FPS per channel upon connection to 8 cameras* |
|---------------------------------------|--------------------------------|-------------------------------|-----------------------------------|---|
| 960 H / 25 | 960 H / 25 | 200 | 8 x 25 | 25 |
| 720 P / 25 | 720 P / 25 | 200 | 8 x 25 | 25 |
| 1080 P / 25 | 1080 P / 25 | 144-150 | 6 x 25 | 18 |
| 3 MP / 18 | 3 MP / 18 | 72 | 4 x 18 | 9 |
| 4 MP / 15 | 4 MP / 15 | 60-64 | 4 x 15 | 8 |
| 4 MP / 25 | 1,8 MP / 25 | 200 | 8 x 25 | 25 |
| 5 MP / 12 | 5 MP / 12 | 48 | 4 x 12 | 6 |
| 5 MP / 20 | 2,5 MP / 20 | 80 | 4 x 20 | 10 |
| 8 MP / 15 | 4 MP / 15 | 60-64 | 4 x 15 | 8 |

Admintool may be used for XVR maintenance:

- Updating firmware.
- Network setup.
- Saving and restoring settings.
- Collecting service logs.

For detailed adjustment of the video server and configuring IP cameras, you can use a Line software workstation or a local management.

Various Line devices may be integrated into a single interface.

Support for the “Line Cloud” service:

- Online monitoring of the video surveillance system.
- SMS and E-mail notifications.
- DynamicDNS domain name service.
- Logging the DVR status.
- FTP archive for storing important videos.
- Connecting to the recorder without a white IP via TURN.

- Support for formats HD-TVI, AHD, CVI, CVBS and IP
- Support for 2 monitors
- Support for USB mouse
- Support for analytics in the archive
- Support for joint work with other Line software-based servers
- Support for “Line Cloud” service
- Support for “Line.Retransmitter” service
- Support for products of 152 leading manufacturers of IP cameras
- Support for two 3.5” hard drives for archive storage*



8 video channels



up to 8 audio channels



* HDD is not included into any scope of delivery of Line video recorders.

Support for ONVIF protocol and RTSP stream

Line 7 SW

Without software restrictions:

- remote monitoring and viewing the archive,
- full-fledged remote administration,
- extended user rights,
- a web server,
- viewing from mobile devices running on iOS, Android.

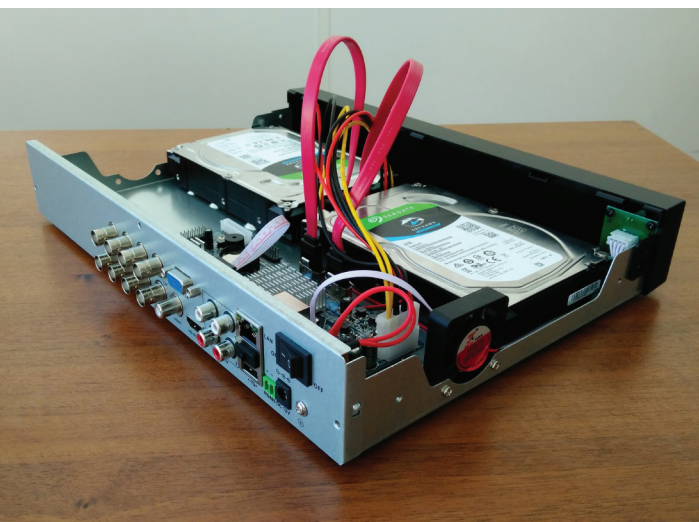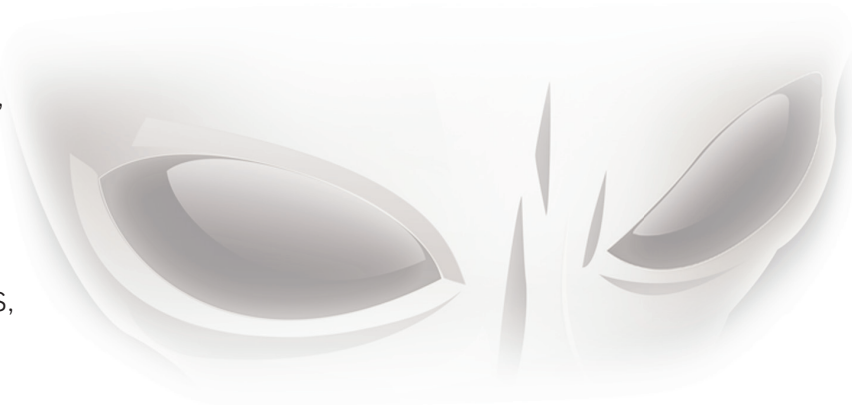

3 years warranty

Specifications:

| | |
|-----------------------------|----------------------|
| operating system | Linux |
| network interface | 100 Mbps |
| video outputs | 1xHDMI, 1xVGA |
| other connections | 2xUSB2.0, RS-485 |
| analog video inputs | BNC-8 |
| analog audio inputs | RCA-4 |
| analog audio outputs | RCA-1 |
| HDD | 2x SATA (up to 24Tb) |
| operating temperature range | 0...+55 °C |
| power | 12V/4A/DC |
| power consumption | up to 48 W |
| dimensions HxWxD | 54x326x250 |
| net weight | 1.2 kg |